



QTREN Series

Energy efficient solutions in traditional designs.


With its super quiet operation, these bath fans won't call attention to themselves or overpower the design of your bath or powder room. More important, they won't call attention on your electric bill. The QTREN line for energy efficiency was developed for the high-traffic bathroom and for those who seek a fan with a more traditional design. It simply does its job quietly, in every sense of the word.

- Energy Star qualified
- Permanently lubricated motor engineered for continuous operation
- UL listed for use over bathtubs and showers when connected to a GFCI protected branch circuit
- Resilient anti-vibration motor mounts
- Dynamically balanced centrifugal blower wheel for quiet and efficient performance
- Rugged steel housing features mounting ears plus adjustable hanging bars
- 4" round duct connector
- Includes unique spacer (patent pending) for mounting to engineered "I" joists
- Lighted models include 2-18 watt compact fluorescent GU24 type bulbs (4 watt night-light bulb not included)
- Suitable for 2" x 8" constructions

SPECIFICATIONS

| MODEL | FUNCTION | CFM AT 0.1" SP* | L/s** AT 0.1" SP | CFM AT 0.25" SP | SONES AT 0.1" SP | POWER RATING | WATTS AT 0.1" SP | SHIPPING WEIGHT (POUNDS) | DUCT SIZE |
|-------------|-----------|-----------------|------------------|-----------------|------------------|--------------|------------------|--------------------------|-----------|
| QTRENO70C | Fan | 70 | 33.0 | 48 | 0.8 | 120/60 | 28.4 | 12.0 | 4" |
| QTRENO80C | Fan | 80 | 37.8 | 55 | 0.8 | 120/60 | 28.4 | 12.0 | 4" |
| QTRENO90C | Fan | 90 | 42.5 | 68 | 1.0 | 120/60 | 29.7 | 12.0 | 4" |
| QTREN110C | Fan | 110 | 51.9 | 90 | 1.3 | 120/60 | 36.3 | 12.0 | 4" |
| QTRENO90FLC | Fan-Light | 90 | 42.5 | 68 | 1.0 | 120/60 | 29.7 | 15.4 | 4" |
| QTREN110FLC | Fan-Light | 110 | 51.9 | 90 | 1.3 | 120/60 | 36.3 | 15.4 | 4" |

* Static pressure
** Litres per second

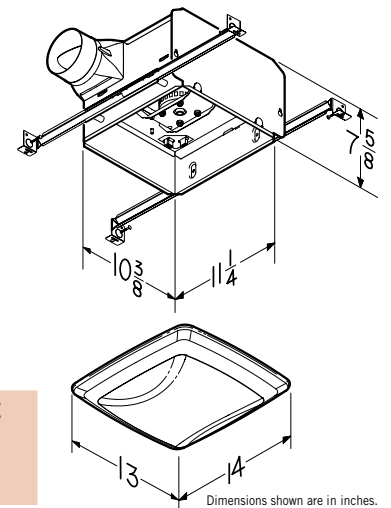

86179B