



QTRN Series

Quiet performance and traditional styled grilles that blend with any décor.

For the bathroom that's not used everyday, you may not be as concerned about energy efficiency. QTRN fan and fan-light models are still among the quietest products in their category and the lighted models feature soft incandescent lighting.


- Permanently lubricated motor engineered for continuous operation
- Dynamically balanced centrifugal blower wheel for quiet and efficient performance
- Rugged steel housing with sturdy, easy, four-point mounting directly to joist
- cUL and UL listed for use over bathtubs and showers when connected to a GFCI protected branch circuit
- Housing features mounting ears plus adjustable hanger bars
- Lighted models feature bright 100-watt lighting and 4-watt night-light (bulbs not included)
- Suitable for 2" x 8" constructions
- 4" round duct connector
- Available in lighted and non-lighted models

SPECIFICATIONS

MODEL	FUNCTION	CFM AT 0.1" SP*	L/s** AT 0.1" SP	CFM AT 0.25" SP	SONES AT 0.1" SP	POWER RATING	AMPS	SHIPPING WEIGHT (POUNDS)	DUCT SIZE
QTRN090C	Fan	90	42.5	68	1.0	120/60	0.9	12.4	4"
QTRN110C	Fan	110	51.9	99	1.5	120/60	0.9	12.4	4"
QTRN090LC	Fan-Light	90	42.5	68	1.0	120/60	1.8	13.8	4"
QTRN110LC	Fan-Light	110	51.9	99	1.5	120/60	1.8	13.8	4"

* Static pressure

** Litres per second

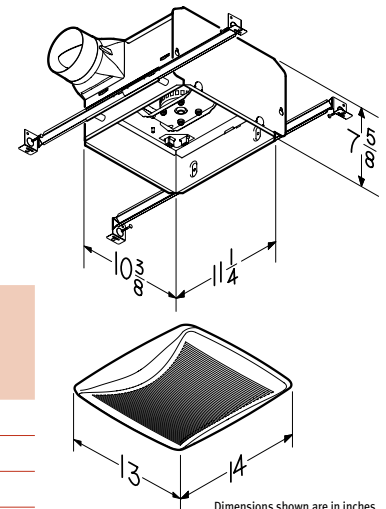

Dimensions shown are in inches.



87441B